




S3PDB(1NXX

Three Phase Rectifier Modules



Type	V _{RSM} V	V _{RRM} V
S3PDB(1N08	900	800
S3PDB(1N12	1300	1200
S3PDB(1N14	1500	1400
S3PDB(1N16	1700	1600
S3PDB(1N18	1900	1800

Dimensions in mm (1mm=0.0394")

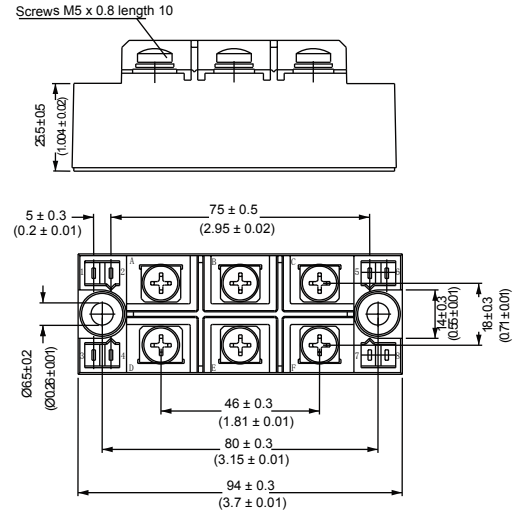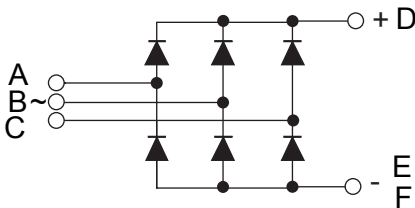

Symbol	Test Conditions	Maximum Ratings	Unit	
I _{dav}	T _C =110°C, module	41	A	
I _{dav}	T _A =60°C (R _{thCA} =0.6K/W), module	75		
I _{FSM}	T _{VJ} =45°C V _R =0	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	270 284	A
	T _{VJ} =T _{VJM} V _R =0	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	230 240	
I ² t	T _{VJ} =T _{VJM} V _R =0	t=8.3ms(60Hz), sine	3650	A ² s
T _{VJ} T _{VJM} T _{stg}		-40...+150 150 -40...+150	°C	
V _{ISOL}	50/60Hz, RMS I _{ISOL} ≤1mA	t=1min t=1s	2500 4000	V~
M _d	Mounting torque (M5) Terminal connection torque (M5)		5 ± 15% 5 ± 15%	Nm
Weight	typ.		176	g



S3PDB41

Three Phase Rectifier Modules

Symbol	Test Conditions	Characteristic Values	Unit
I_R	$V_R=V_{RRM}; T_{VJ}=25^{\circ}C$ $V_R=V_{RRM}; T_{VJ}=T_{VJM}$	≤ 0.2 ≤ 3	mA
V_F	$I_F=64A; T_{VJ}=25^{\circ}C$	≤ 1.6	V
V_{TO}	For power-loss calculations only	0.85	V
r_T	$T_{VJ}=T_{VJM}$	6.5	$m\Omega$
R_{thJC}	per diode per module	2.36 0.39	K/W
R_{thJK}	per diode per module	2.52 0.42	K/W
d_s	Creeping distance on surface	10	mm
d_A	Creepage distance in air	9.4	mm
a	Max. allowable acceleration	50	m/s^2

FEATURES

- * Package with screw terminals
- * Isolation voltage 4000 V~
- * Blocking voltage up to 1800 V
- * Low forward voltage drop

APPLICATIONS

- * Supplies for DC power equipment
- * Input rectifiers for PWM inverter
- * Battery DC power supplies
- * Field supply for DC motors

ADVANTAGES

- * Easy to mount with two screws
- * Space and weight savings
- * Improved temperature and power cycling



S3PDB41

Three Phase Rectifier Modules

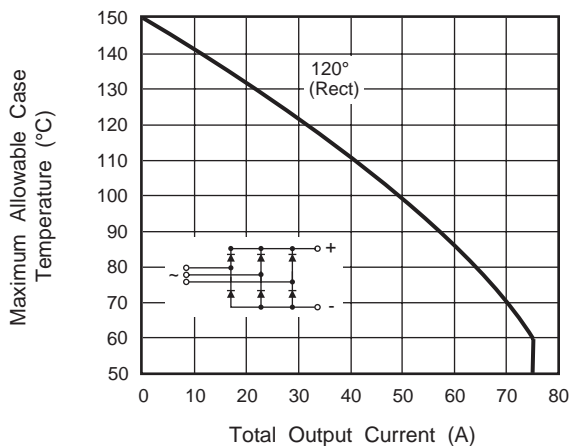


Fig. 1 - Current Ratings Characteristics

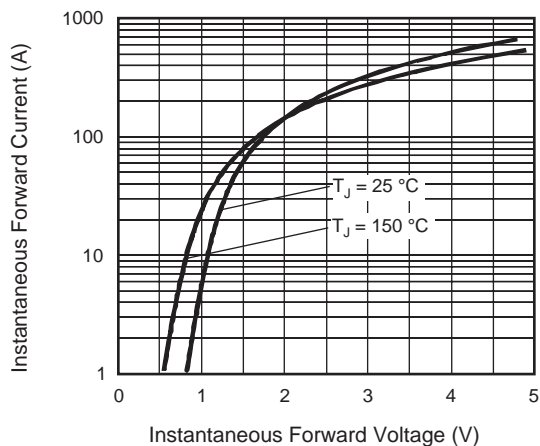


Fig. 2 - Forward Voltage Drop Characteristics

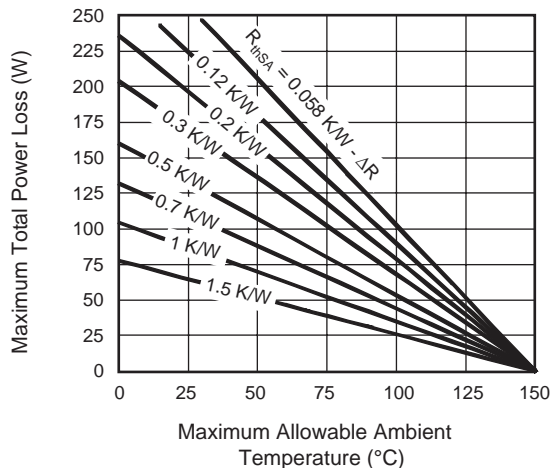
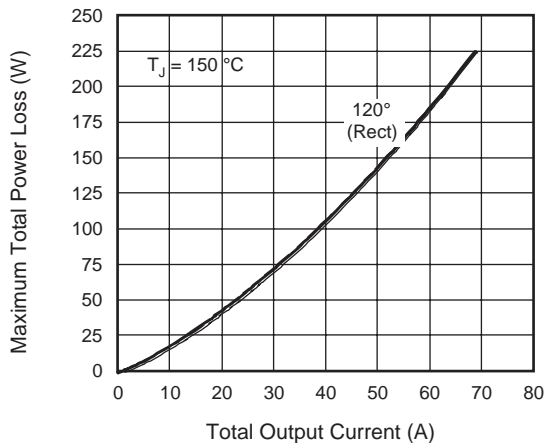


Fig. 3 - Total Power Loss Characteristics

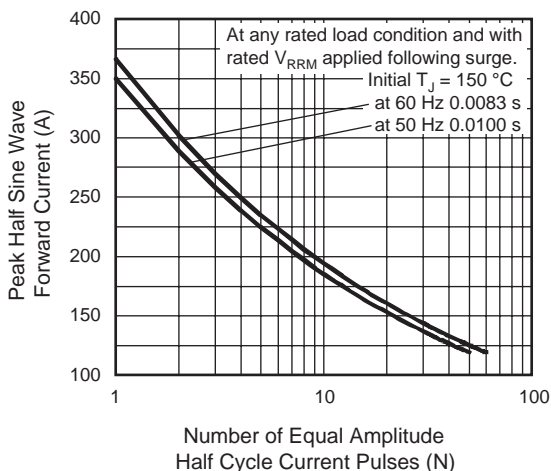


Fig. 4 - Maximum Non-Repetitive Surge Current

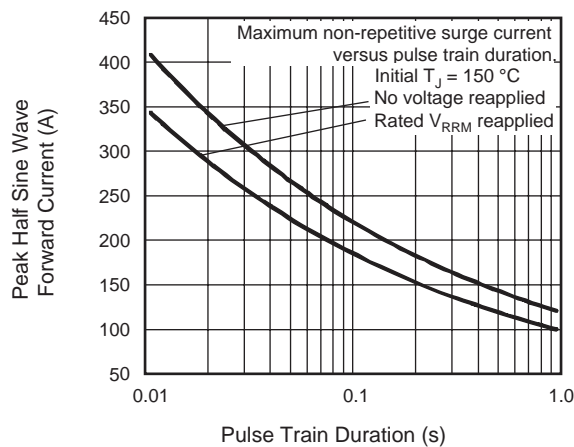


Fig. 5 - Maximum Non-Repetitive Surge Current



S3PDB41

Three Phase Rectifier Modules

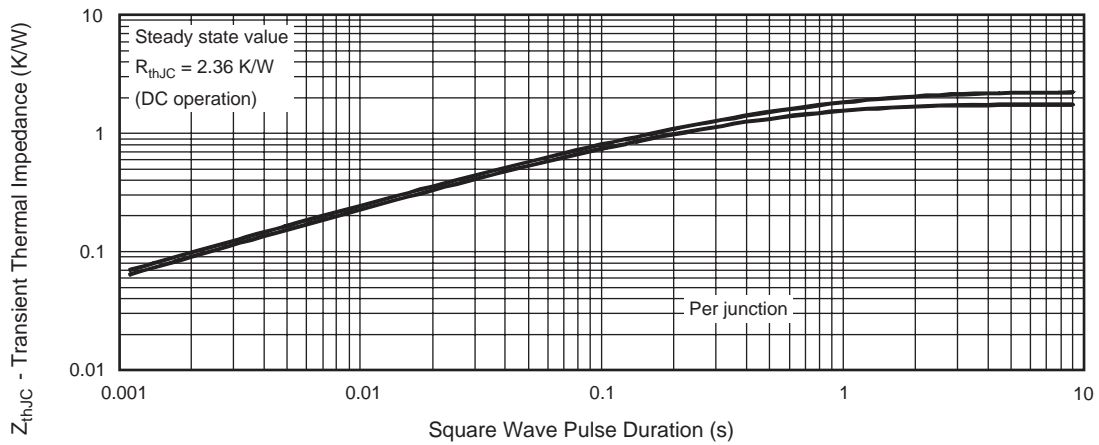


Fig. 6 - Thermal Impedance Z_{thJC} Characteristics

