




S3PDB161

Three Phase Rectifier Modules



Type	V _{RSM} V	V _{RSM} V
S3PDB161N08	900	800
S3PDB161N12	1300	1200
S3PDB161N14	1500	1400
S3PDB161N16	1700	1600
S3PDB161N18	1900	1800

Dimensions in mm (1mm=0.0394")

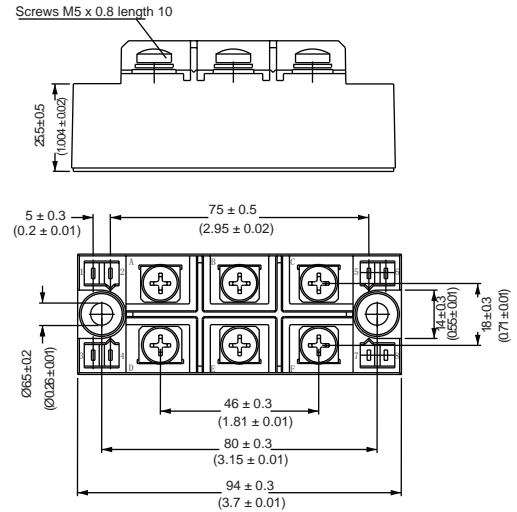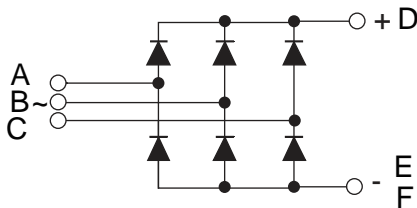

Symbol	Test Conditions	Maximum Ratings	Unit	
I_{dav}	T _C =110°C, module	161	A	
I_{dav}	T _A =45°C (R _{thCA} =0.6K/W), module	201		
I_{FSM}	T _{VJ} =45°C V _R =0	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	1340 1500	A
	T _{VJ} =T _{VJM} V _R =0	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	1200 1260	
I²t	T _{VJ} =45°C V _R =0	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	10200 9300	A ² s
	T _{VJ} =T _{VJM} V _R =0	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	7900 6600	
T_{VJ} T_{VJM} T_{stg}		-40...+150 150 -40...+150	°C	
V_{ISO L}	50/60Hz, RMS I _{ISO L} ≤1mA	t=1min t=1s	2500 4000	V~
M_d	Mounting torque (M5) Terminal connection torque (M5)		5 ± 15% 5 ± 15%	Nm
Weight	typ.		176	g



S3PDB161

Three Phase Rectifier Modules

Symbol	Test Conditions	Characteristic Values	Unit
I_R	$V_R=V_{RRM}; T_{VJ}=25^{\circ}C$ $V_R=V_{RRM}; T_{VJ}=T_{VJM}$	≤ 0.2 ≤ 5	mA
V_F	$I_F=200A; T_{VJ}=25^{\circ}C$	≤ 1.49	V
V_{TO}	For power-loss calculations only	0.8	V
r_T	$T_{VJ}=T_{VJM}$	5	$m\Omega$
R_{thJC}	per diode per module	0.73 0.12	K/W
R_{thJK}	per diode per module	0.90 0.17	K/W
d_s	Creeping distance on surface	10	mm
d_A	Creepage distance in air	9.4	mm
a	Max. allowable acceleration	50	m/s^2

FEATURES

- * Package with screw terminals
- * Isolation voltage 4000 V~
- * Blocking voltage up to 1800 V
- * Low forward voltage drop

APPLICATIONS

- * Supplies for DC power equipment
- * Input rectifiers for PWM inverter
- * Battery DC power supplies
- * Field supply for DC motors

ADVANTAGES

- * Easy to mount with two screws
- * Space and weight savings
- * Improved temperature and power cycling



S3PDB161

Three Phase Rectifier Modules

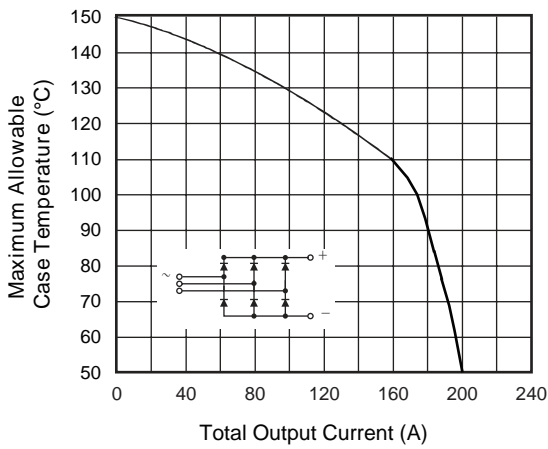


Fig. 1 - Current Ratings Characteristic

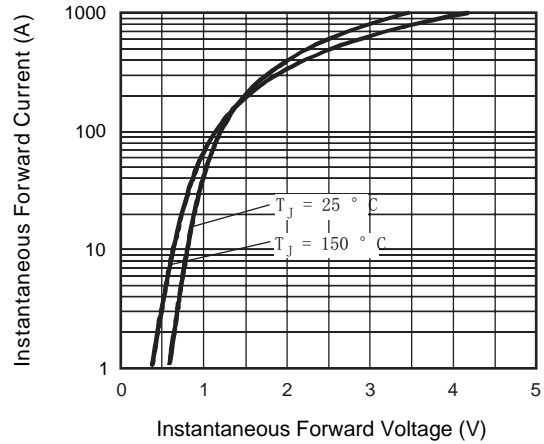


Fig. 2 - Forward Voltage Drop Characteristics

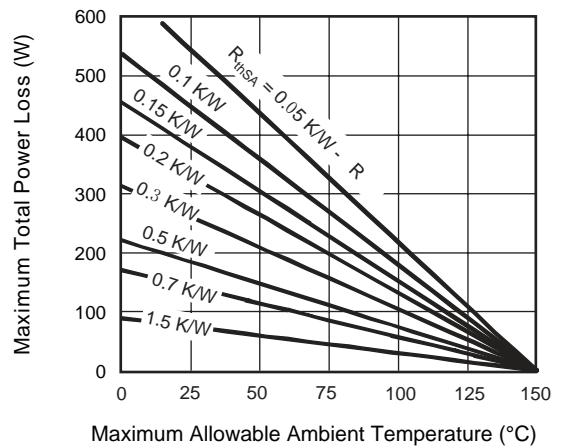
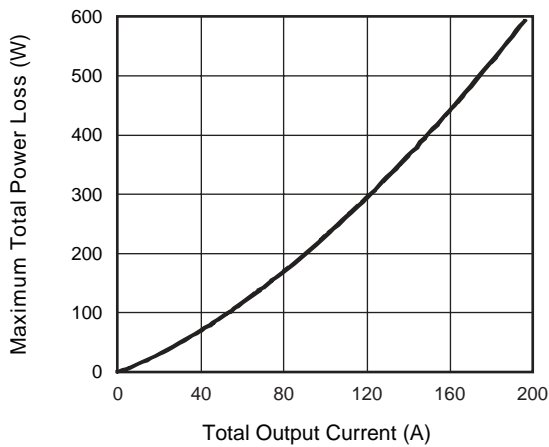


Fig. 3 - Total Power Loss Characteristics

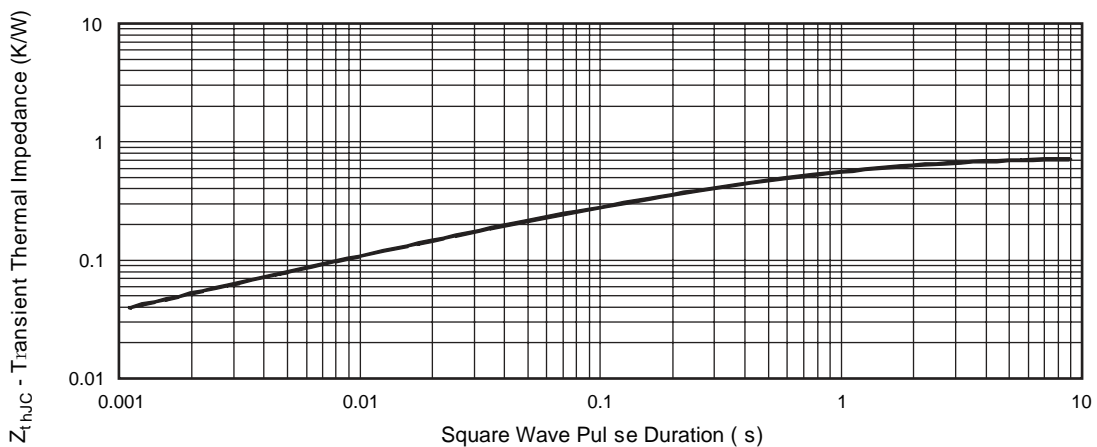


Fig. 4 - Thermal Impedance Z_{thJC} Characteristic

