



MUR1560F


Ultra Fast Recovery Diodes

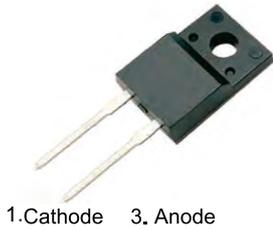

1. Cathode 3. Anode



Dimensions TO-220F-2L

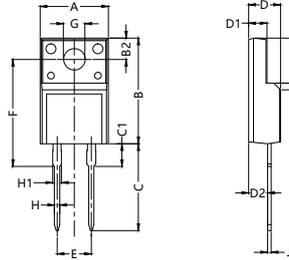

Dim.	Millimeter		Dim.	Millimeter	
	Min.	Max.		Min.	Max.
A	9.80	10.60	D2	2.30	3.30
B	15.40	16.40	E	5.08BSC	
B1	6.00	7.40	F	14.50	16.00
B2	3.20	3.80	ØG	2.90	3.40
C	12.80	13.50	H	0.60	1.00
C1	3.20	4.00	H1	1.15	1.55
D	4.35	4.95	J	0.35	0.65
D1	2.24	2.84	K	0.00	1.60

	V_{RSM} V	V_{RRM} V
MUR1560F	600	600



Symbol	Test Conditions	Maximum Ratings	Unit	
I_{FRMS}	$T_{VJ}=T_{VJM}$	25	A	
I_{FAVM}	$T_C=100^{\circ}C$; rectangular, $d=0.5$	15		
I_{FRM}	$t_p < 10\mu s$; rep. rating, pulse width limited by T_{VJM}	30		
I_{FSM}	$T_{VJ}=45^{\circ}C$	$t=10ms$ (50Hz), sin $t=8.3ms$ (60Hz), sine	150 165	A
	$T_{VJ}=150^{\circ}C$	$t=10ms$ (50Hz), sin $t=8.3ms$ (60Hz), sine	125 140	
I^2t	$T_{VJ}=45^{\circ}C$	$t=10ms$ (50Hz), sin $t=8.3ms$ (60Hz), sine	70 75	A ² s
	$T_{VJ}=150^{\circ}C$	$t=10ms$ (50Hz), sin $t=8.3ms$ (60Hz), sine	49 52	
T_{VJ} T_{VJM} T_{stg}		-40...+150 150 -40...+150	$^{\circ}C$	
P_{tot}	$T_C=25^{\circ}C$	70	W	
M_d	Mounting torque	0.4...0.6	Nm	
V_{ISO}	1min	>2500	Vac	
Weight		2	g	

MUR1560F

Ultra Fast Recovery Diodes

Symbol	Test Conditions	Characteristic Values		Unit
		typ.	max.	
I_R	$T_{VJ}=25^{\circ}\text{C}; V_R=V_{RRM}$		50	μA
	$T_{VJ}=25^{\circ}\text{C}; V_R=0.8 \cdot V_{RRM}$		25	μA
	$T_{VJ}=125^{\circ}\text{C}; V_R=0.8 \cdot V_{RRM}$		3	mA
V_F	$I_F=15\text{A}; T_{VJ}=150^{\circ}\text{C}$		1.5	V
	$T_{VJ}=25^{\circ}\text{C}$		1.7	
V_{TO}	For power-loss calculations only		1.12	V
r_T	$T_{VJ}=T_{VJM}$		23.2	m Ω
R_{thJC} R_{thCK} R_{thJA}		0.5	2	K/W
			60	
t_{rr}	$I_F=1\text{A}; -di/dt=50\text{A}/\mu\text{s}; V_R=30\text{V}; T_{VJ}=25^{\circ}\text{C}$	35	50	ns
I_{RM}	$V_R=350\text{V}; I_F=15\text{A}; -di_F/dt=100\text{A}/\mu\text{s}; L \leq 0.05\mu\text{H}; T_{VJ}=100^{\circ}\text{C}$	4	4.4	A

FEATURES

- * International standard package TO-220F-2L
- * Glass passivated chips
- * Very short recovery time
- * Extremely low switching losses
- * Low I_{RM} -values
- * Soft recovery behaviour
- * RoHS compliant


APPLICATIONS

- * Antiparallel diode for high frequency switching devices
- * Antisaturation diode
- * Snubber diode
- * Free wheeling diode in converters and motor control circuits
- * Rectifiers in switch mode power supplies (SMPS)
- * Inductive heating and melting
- * Uninterruptible power supplies (UPS)
- * Ultrasonic cleaners and welders

ADVANTAGES

- * High reliability circuit operation
- * Low voltage peaks for reduced protection circuits
- * Low noise switching
- * Low losses
- * Operating at lower temperature or space saving by reduced cooling

MARKING

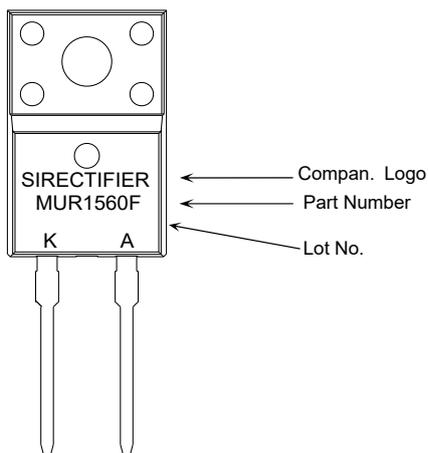

ORDERING INFORMATION

Part Number	Package	Shipping	Marking Code
MUR1560F	TO-220F-2L	50pcs / Tube	MUR1560F

Sirectifier[®]

MUR1560F

Ultra Fast Recovery Diodes

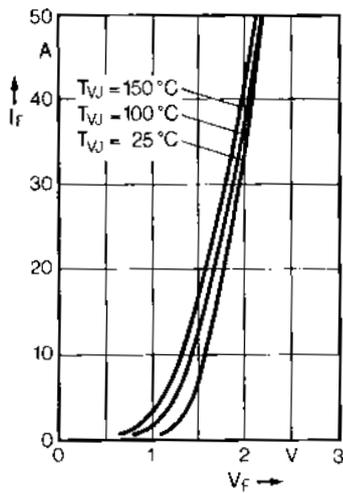


Fig. 1 Forward current versus voltage drop.

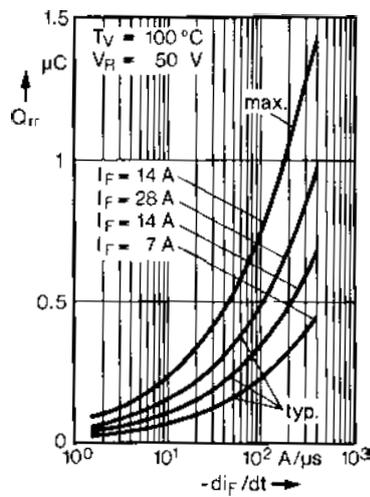


Fig. 2 Recovery charge versus $-di_f/dt$.

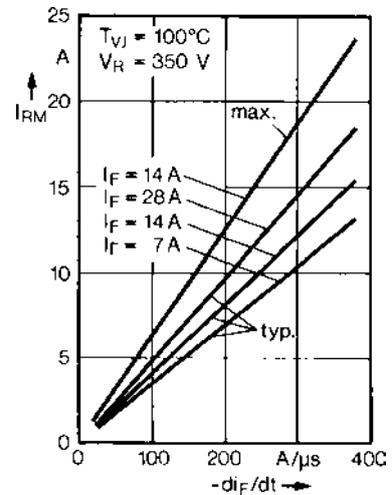


Fig. 3 Peak reverse current versus $-di_f/dt$.

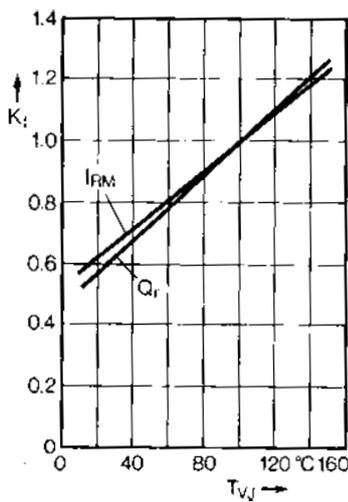


Fig. 4 Dynamic parameters versus junction temperature.

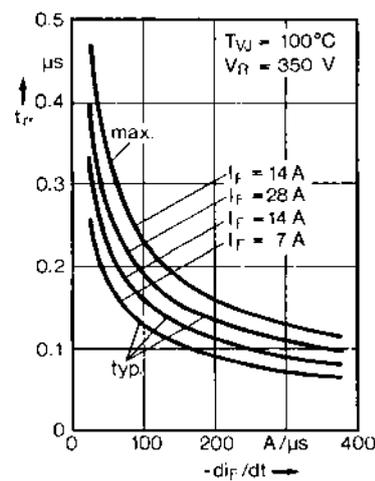


Fig. 5 Recovery time versus $-di_f/dt$.

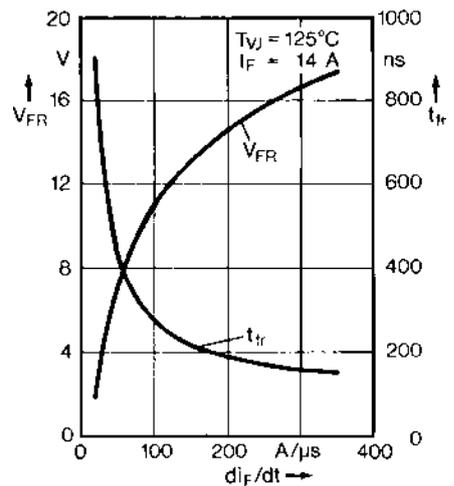


Fig. 6 Peak forward voltage versus di_f/dt .

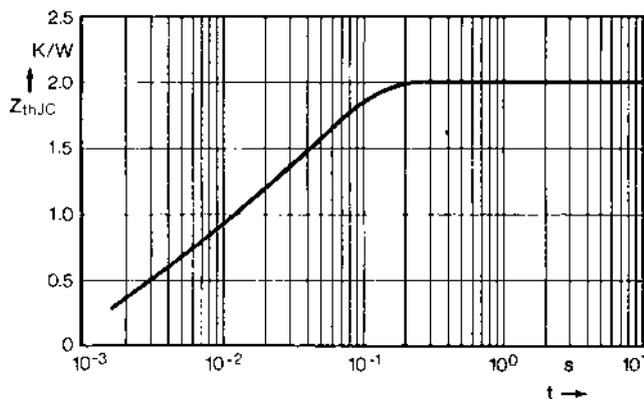


Fig. 7 Transient thermal impedance junction to case.